BARINA SUNROOF

Quick reference guide

HOLDEN

*SUNROOF**

OPERATING THE SUNROOF

The sunroof control is located in the roof between the sun visors. The sunroof can be tilted or can slide back into the roof.

The sunroof will operate with the ignition in the ACCESSORIES or ON position.

WARNING

Always observe the following precautions:

- Do not place fingers or objects near the sunroof when operating.
- Do not place heavy objects on or around the sunroof.
- Remove debris from the outside of the sunroof.
- When leaving the vehicle unattended, close the sunroof fully.
- As at all other times, all occupants must wear their safety belts whether the sunroof is open or closed.
- Failure to observe these precautions may result in personal injury or damage to your vehicle.
- Fitting an aftermarket sunroof may void the warranty on your vehicle and could result in injury to the vehicle occupants in the event of an accident.

TK_SR003

Opening the sunroof

To open the sunroof, press and hold the right side of the switch.

Release the switch when the sunroof reaches the desired position.

Closing the sunroof

To close the sunroof, press and hold the left side of the switch.

Release the switch when the sunroof reaches the desired position.

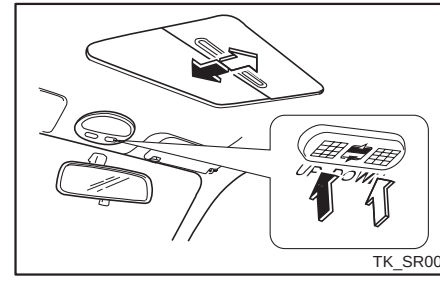

TK_SR001

*The asterisk signifies equipment options not in all vehicles, model variants, engine options, optional equipment and Genuine Holden Accessories (and Parts).

SUNROOF cont.*

Tilting the sunroof

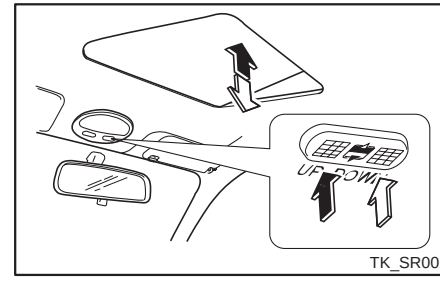

To tilt the sunroof up, press and hold the left side of the switch.

To return the sunroof to its original position, press and hold the right side of the switch.

Release the switch when the sunroof reaches the desired position.

Note Periodically inspect the guide rail for dirt and clean if any has accumulated. If there is dirt around the rubber of the sunroof, noise may be heard when operating the sunroof.

Cleaning and maintenance

WARNING

The tinted glass panel on the sunroof is heat and UV resistant. Ensure that due care is taken and that the directions below are followed when cleaning.

Regularly clean the glass, flocked seal and roof flanges with a moist, soft cloth.

Printed in Australia

Part no. 92249272
September 2009 (TK Barina sunroof operation. Print 1)

© 2009 GM Holden Ltd
Reproduction in whole or part is prohibited
without written approval from GM Holden Ltd,
ABN 84 006 893 232

HOLDEN

GM Holden Ltd, ABN 84 006 893 232 (hereinafter Holden)

This supplement should be kept together with the owner's handbook in the glovebox of your vehicle.